



# TYPE "1" DRIVEWAY

NO SCALE

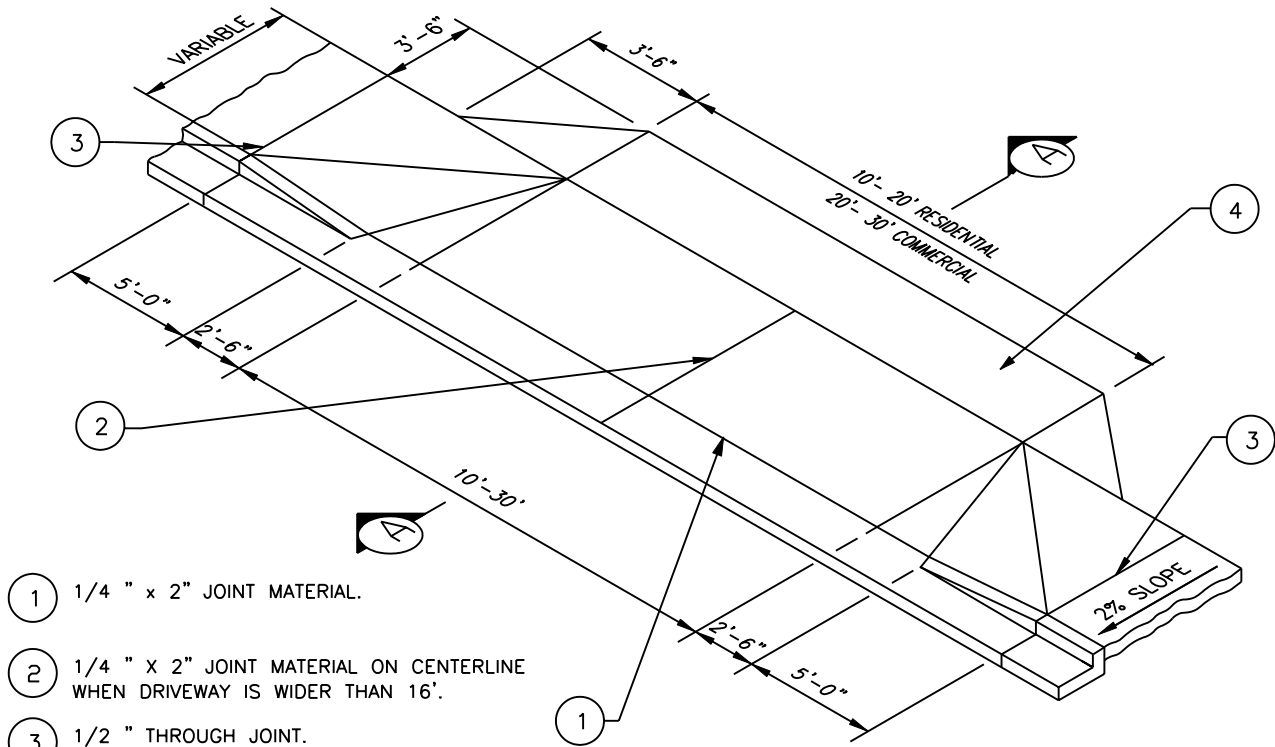

- 1 1/4 " x 2" JOINT MATERIAL.
- 2 1/4 " x 2" JOINT MATERIAL ON CENTERLINE WHEN DRIVEWAY IS WIDER THAN 16'.
- 3 1/2 " THROUGH JOINT.
- 4 IF DRIVEWAY SLOPE EXCEEDS 2%, A 42" WALKWAY IS REQUIRED BEHIND THE DRIVEWAY.
- 5 DRIVEWAY SURFACE SHALL RECEIVE A LIGHT BRUSH FINISH TRANSVERSE TO THE VEHICLE FLOW. (STANDARD SPEC. PAGE 3.2)
- 6 4"x4" NO. 4 GAGE WELDED WIRE MESH REQUIRED FOR COMMERCIAL DRIVEWAYS. PER AASHTO M55

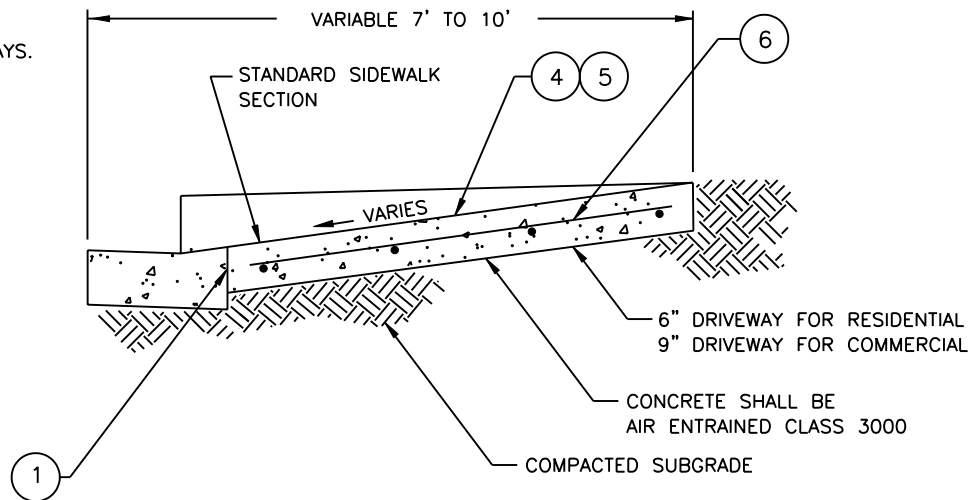

## SECTION A-A

APPROVED: RICHARD H. BARTHOL

REV. DATE: JULY 1, 2000

ENGINEERING DIVISION



STANDARD DETAILS

## TYPE "1" DRIVEWAY

FILE SD305.DWG DRAWING NO. 305